
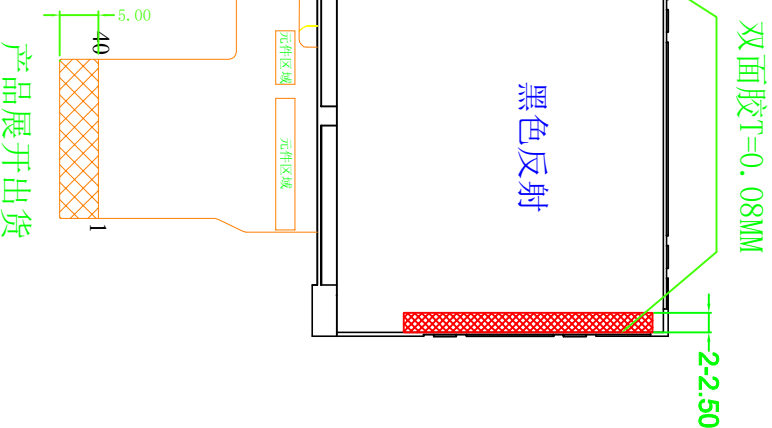



REV	DESCRIPTION	NAME	DATE
V.0	Ex 1301/4	YZD	2021.12.28
V.0		YZD	2023.05.27

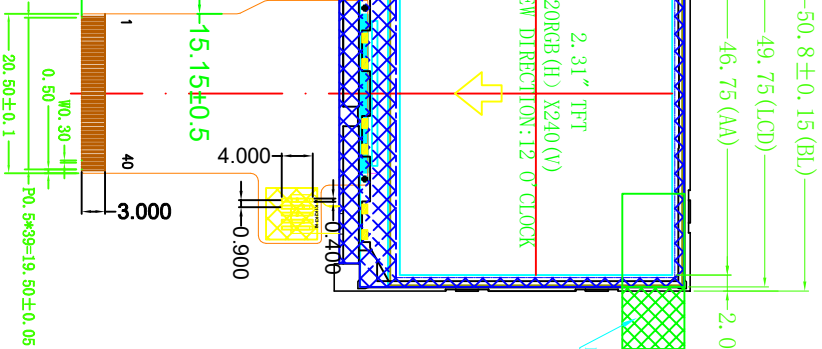

1	LEDA
2	LED-K1
3	LED-K2
4	LED-K3
5	LED-K4
6	GND
7	RESET
8-23	DB15-DB0
24	IM1
25	RD
26	WR
27	RS
28	CS
29	IOVCC (1.8-3.3V)
30	VCC(2.8-3.3V)
31	NC
32	GND
33-40	NC

NOTES:

1. DISPLAY TYPE: 262K Colors LCD, Trans
2. OPERATING TEMP.: -20°C~70°C
3. STORAGE TEMP.: -30°C~80°C
4. LCD DRIVER: IL19342C
5. BACKLIGHT: 4CHIP-WHITE LED, If=80mA
6. UNMARKED TOLERANCE: ±0.2
7. 符合ROHS要求
8. 建议机壳V.A开窗比LCD的A.A单边大0.5




背光电路:

If=80mA(tpye), Vf=3.2(tpye)
背电路图 (CIRCUIT DIAGRAM)

Select the MCU interface mode:

IM1接GND	MCU 8-bit (DB0-DB7)
IM1接IOVCC	MCU 16-bit (DB0-DB15)

			
博酷 驰宇微科技 Tel.: 0755-29446830 web: www.cyw1cd.com		深圳驰宇微科技有限公司	
TITLE ID:	CYWTFT023H005	VERSION ID:	V.1
产品型号:		版本号:	
DRAWN BY:	TOM	CHECKED BY:	
绘图:		审核:	
APPROVED BY:		Date:	2022.05.27
批准:		日期:	
UNIT'S:	MM	SCALE:	1:1
单位:		比例:	
PAGE:	1/1	页码:	